


ViewSonic® LCD DISPLAY **VA1650**

Key Features

- Lightweight, compact, and portable design with protective sleeve for easy and safe transport
- Easily extend display to a larger screen from mobile devices
- HDMI and USB-C inputs for flexible connectivity
- Find your perfect view every time with the foldable stand
- USB-C one cable flexible display setup

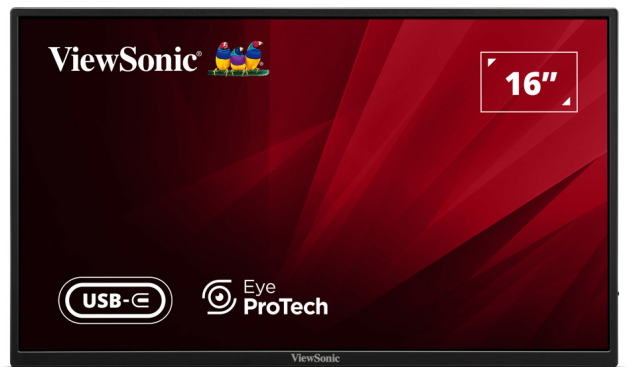

*External power adaptor required for power charging

Product Description

The ViewSonic VA1650 is a lightweight, portable 16" Full HD portable monitor with USB-C connectivity for power charging. Designed to boost productivity on the go, extend your screen from a phone, tablet, or laptop to a larger display anytime, anywhere. The included protective sleeve makes it effortless to safely carry and protect your monitor, whether traveling, relaxing outdoors, or simply moving around your home.

Visit Us

www.viewsonic.com

DISPLAY

Display Size (in.):	16
Viewable Area (in.):	15.6
Panel Type:	IPS Technology
Resolution:	1920 x 1080
Resolution Type:	FHD (Full HD)
Static Contrast Ratio:	1,000:1 (typ)
Dynamic Contrast Ratio:	50M:1
Light Source:	LED
Brightness:	250 cd/m ² (typ)
Colors:	16.7M
Color Space Support:	8 bit (6 bit + FRC)
Aspect Ratio:	16:9
Response Time (Typical GTG):	7ms
Viewing Angles:	178° horizontal, 178° vertical
Backlight Life (Hours):	30000 Hrs (Min)
Curvature:	Flat
Refresh Rate (Hz):	60
Low Blue Light:	Software solution
Flicker-Free:	Yes
Color Gamut:	NTSC: 45% size (Typ) sRGB: 64% size (Typ)
Pixel Size:	0.179 mm (H) x 0.179 mm (V)
Surface Treatment:	Anti-Glare, Hard Coating (3H)

COMPATIBILITY

PC Resolution (max):	1920x1080
Mac® Resolution (max):	1920x1080
PC Operating System:	Windows 10/11 certified; macOS tested
Mac® Resolution (min):	1920x1080

CONNECTOR

USB 3.2 Type C DisplayPort Alt mode only :	1 (65W power charger)
3.5mm Audio Out:	1
HDMI 1.4:	1
Power in:	USB Type C (power only)

AUDIO

Internal Speakers:	1Watts x2
--------------------	-----------

POWER

Eco Mode (Conserve):	6W
Eco Mode (optimized):	6.5W
Consumption (typical):	7W
Consumption (max):	8.5W
Voltage:	DC 5V/9V/12V/15V/20V
Stand-by:	0.5W
Power Supply:	External (Optional)

CONTROLS

Physical Controls:	Lever push key: Up, Enter, Down, Return (power)
On Screen Display:	Input Select, Audio Adjust, ViewMode, Color Adjust, Manual Image Adjust, Setup Menu

OPERATING CONDITIONS

Temperature:	32°F to 104°F (0°C to 40°C)
Humidity (non-condensing):	20% to 90%

WALL MOUNT

VESA Compatible:	Customized, 75 mm
------------------	-------------------

INPUT SIGNAL

Frequency Horizontal:	HDMI (v1.4): 15 ~ 82KHz, Type C: 24 ~ 82KHz
Frequency Vertical:	HDMI (v1.4): 50 ~ 75Hz, Type C: 50 ~ 75Hz

VIDEO INPUT

Digital Sync:	TMDS - HDMI (v1.4), Micro-Packet - Type C
---------------	---

ERGONOMICS

Tilt (Forward/Back):	20° / 47.5°
----------------------	-------------

WEIGHT (IMPERIAL)

Net (lbs):	1.5
Net Without Stand (lbs):	1.5
Gross (lbs):	3.3

WEIGHT (METRIC)

Net (kg):	0.7
Net Without Stand (kg):	0.7
Gross (kg):	1.5

DIMENSIONS (IMPERIAL) (WXHXD)

Packaging (in.):	16.4 x 11.4 x 2.1
Physical (in.):	14.09 x 8.29 x 0.55
Physical Without Stand (in.):	14.09 x 8.29 x 0.55

DIMENSIONS (METRIC) (WXHXD)

Packaging (mm):	416 x 290 x 54
Physical (mm):	357.8 x 210.5 x 13.9
Physical Without Stand (mm):	357.8 x 210.5 x 13.9

GENERAL

Regulations:	CE, CE EMC, CB, RoHS, ErP, REACH, WEEE, EAC, UkrSEPRO
PACKAGE CONTENTS:	VA1650 x1, USB Type-C Cable (Male-Male) x1, Quick Start Guide x1, Sleeve case x1
Recycle/Disposal:	Please dispose of in accordance with local, state or federal laws.
Warranty:	*Warranty offered may differ from market to market